


### 产品概述

RT16系列交流刀型触头熔断器，具有体积小、重量轻、功耗小、分断能力高等特点。适用于交流额定功率50Hz，额定电压AC500V/AC690V及以下，额定电流至1250A的配电装置中，有过载和短路保护作用。

符合标准：GB/T 13539.2、IEC60269-2。

### 产品型号及含义

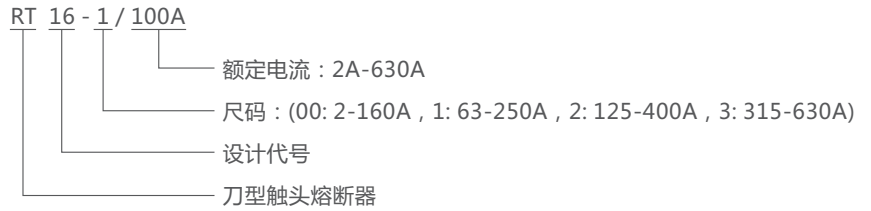

### 主要技术参数

型号	额定电流(A)	额定电压(V)	额定耗散功率(W)	额定分断能力(W)
RT16-00	2	500/690	1.3	120/50
	4		1.5	
	6		1.6	
	8		1.7	
	10		1.8	
	16		2.1	
	20		2.5	
	25		3.1	
	32		3.6	
	40		4.0	
	50		5.3	
	63		6.2	
	80		6.9	
	100		10.0	
RT16-1	125	500/690	11.6	120/50
	160		12	
	80		8.4	
	100		12.3	
	125		13.7	
RT16-2	160	500/690	16.6	120/50
	200		21.2	
	250		23.0	
	125		21.7	
	160		23.1	
	200		26.8	
	224		29.1	
RT16-3	250	500/690	31.2	120/50
	315		32.5	
	350		33.6	
	400		34	
	315		34.5	
	400		38.0	
	500		45.3	
	630	690	48.0	100
	800	690	75.3	100